

DTX Anchor

- 316 stainless steel
- Proven performance
- Lead ballasted tip for fast setting
- 3 year warranty
- Ordinary Holding Power
- Full range from 6kg-63kg



DTX


- A** Lewmar branding guarantees quality and authenticity
- B** Useful eye for anchor trip line
- C** Weight concentrated over tip for quick setting
- D** Support bar to help prevent fluke deformation

Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL							
kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft
6	14	█							
10	22		█						
16	35			█					
20	44				█				
25	55					█			
32	70						█		
40	88							█	
50	110								█
63	140								█

Lighter shading represents the upper limit of model. If in doubt, move up a model.
This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

Dimensions Diagram

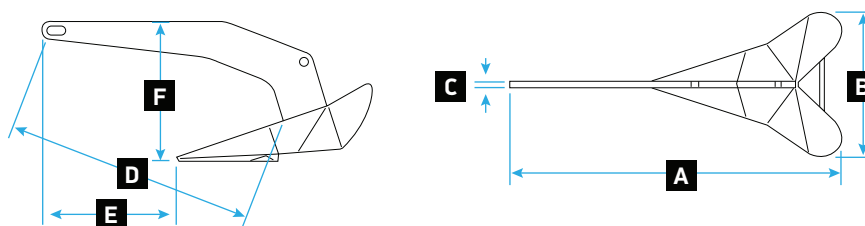

DTX Anchor Specifications

PART NUMBER	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D		E		F	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057206	6	14	6-7	1/4	593	23 3/8	265	10 7/16	10	3/8	450	17 5/8	243	9 1/2	254	10
0057210	10	22	8	5/16	695	27 3/8	310	12 7/32	13	1/2	526	20 5/8	282	11 1/8	292	11 1/2
0057216	16	35	8	5/16	812	32	362	14 1/4	13	1/2	614	24 1/8	328	13	339	13 3/8
0057220	20	44	10	3/8	877	34 1/2	392	15 7/16	16	5/8	663	26 1/8	357	14	368	14 1/2
0057225	25	55	10	3/8	945	37 1/4	415	16 3/8	16	5/8	713	28	387	15 1/4	398	15 5/8
0057232	32	70	10	3/8	1023	40 1/4	453.5	17 7/8	20	3/4	775	30 1/2	425	16 3/4	432	17
0057240	40	88	10	3/8	1103	43 7/16	489	19 1/4	20	3/4	883	32 3/4	437	17 1/4	461	18 1/8
0057250	50	110	12	1/2	1175	46 1/4	523	20 5/8	20	3/4	890	35	479	18 7/8	486	19 1/8
0057263	63	140	12	1/2	1270	50	567	22 5/16	25	1	963	38	508	20	537	21 1/8

Dimensions subject to +/- 2% tolerance



2. Anchoring

Delta® Anchor

The Delta® anchor is constructed of high-grade manganese steel or Duplex stainless steel for maximum tensile strength. Its unique shank profile and ballasted tip make it self-launching. And its low center of gravity and self-righting geometry ensure that it will set immediately.

Consistent and reliable in performance, the Delta® anchor is guaranteed for life against breakage¹, has Lloyd's Register General Approval of an Anchor Design² as a High Holding Power anchor and is specified as the primary anchor used by numerous National Lifeboat organizations.



Galvanized
Delta® Anchor




Stainless Steel
Delta® Anchor

Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL								
kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft	
4	9	█								
6	14		█							
10	22			█						
16	35				█					
20	44					█				
25	55						█			
32	70							█		
40	88								█	
50	110								█	
63	140								█	

Lighter shading represents the upper limit of model. If in doubt, move up a model.
This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

Dimensions Diagram

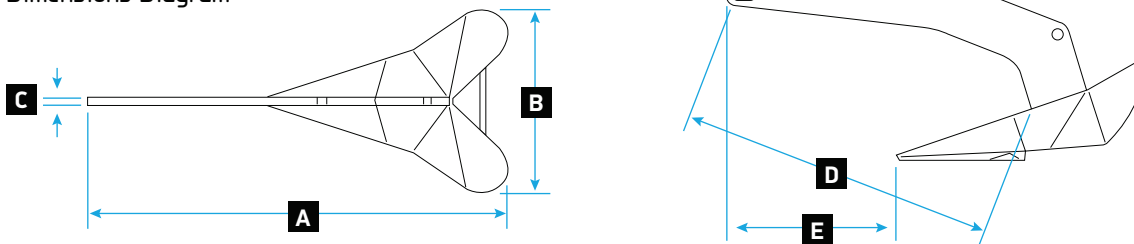

Delta® Anchor Stainless and Galvanised Specifications

GALVANIZED Part No.	STAINLESS Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D		E	
		kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057404		4	9	6-7	¼	514	20 ¼	228	9	8	5/16	387	15 ¼	210	8 ¼
0057406	0057306	6	14	6-7	¼	595	23 ¾	263	10 ¾	10	¾	450	17 ¾	241	9 ½
0057410	0057310	10	22	8	5/16	695	27 ¾	308	12 ½	12	½	526	20 ¾	283	11 ½
0057416	0057316	16	35	8	5/16	812	32	360	14 ½	12	½	614	24 ½	334	13
0057420	0057320	20	44	10	¾	877	34 ½	389	15 ¼	16	5/8	663	26 ½	361	14 ¼
0057425	0057325	25	55	10	¾	945	37 ¼	417	16 ¾	16	5/8	713	28	384	15 ½
0057432	0057332	32	70	10	¾	1026	40 ¾	455	17 ¾	16	5/8	774	30 ½	417	16 ¾
0057440	0057340	40	88	10	¾	1099	43 ¼	489	19 ¼	20	¾	835	32 ¾	446	17 ½
0057450	0057350	50	110	12	½	1175	46 ¼	520	20 ½	20	¾	890	35	479	18 ¾
0057463	0057363	63	140	12	½	1278	50 ¼	568	22 ¾	22	¾	973	38 ¼	518	20 ¾

Dimensions subject to +/- 2% tolerance